

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 July 2005 (21.07.2005)

PCT

(10) International Publication Number  
**WO 2005/067183 A1**

(51) International Patent Classification<sup>7</sup>: **H04B 10/12**,  
H04L 27/26, 5/02, H04J 11/00

(21) International Application Number:  
PCT/US2004/043686

(22) International Filing Date:  
23 December 2004 (23.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/749,184 30 December 2003 (30.12.2003) US

(71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GREEN, Evan,**


**R.** [US/US]; 14720 NW Forestel Loop, Beaverton, OR 97006 (US). **PANICCIA, Mario, J.** [US/US]; 2371 Lass Drive, Santa Clara, CA 95054 (US). **KOEHL, Sean, M.** [US/US]; 1 Forest Glen St., Mountain View, CA 94043 (US). **JONES, Richard** [GB/US]; 2069 Avenida de la Flores, Santa Clara, CA 95054 (US). **ANTHONY, Guy, S.** [US/US]; 295 El Cerrito Ave., Hillsborough, CA 94010 (US).

(74) Agents: **MALLIE, Michael, J.** et al.; Blakely, Sokoloff, Taylor & Zafman LLP, 12400 Wilshire Boulevard, 7th Floor, Los Angeles, CA 90025 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,

[Continued on next page]

(54) Title: BROADBAND RADIO TRANSCEIVER WITH OPTICAL TRANSFORM

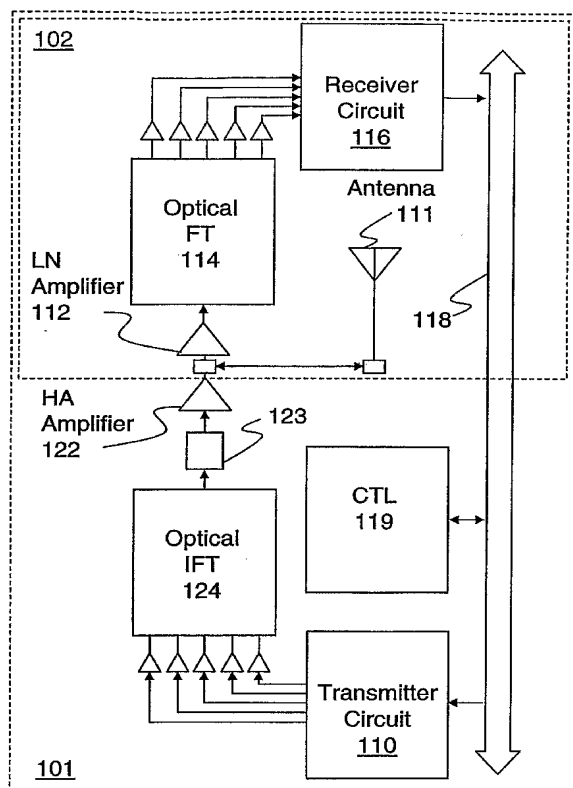

(57) Abstract: A broadband receiving apparatus includes an antenna to receive a radio signal having a plurality of modulation frequencies. An amplifier drives a laser source from the broadband radio signal to produce an optical signal having a plurality of spectral components. A diffraction grating transforms the optical signal into its spectral components. An array of photo-detectors converts the spectral components into electronic signals corresponding to the plurality of modulation frequencies. A transmitting apparatus includes an array of coherent laser emitters driven by electronic signals corresponding to a plurality of modulation frequencies to produce optical signals corresponding to a plurality of spectral components. A diffraction grating inverse transforms the spectral components into a composite optical signal. A photo-detector converts the composite optical signal into a composite electronic signal including the plurality of modulation frequencies. An amplifier amplifies the composite electronic signal for transmission as a broadband radio signal.

WO 2005/067183 A1



PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **BROADBAND RADIO TRANSCEIVER WITH OPTICAL TRANSFORM**

### FIELD OF THE DISCLOSURE

**[0001]** This disclosure relates generally to the fields of wireless communications and silicon photonics. In particular, the disclosure relates to use of an optical transform to perform efficient modulation in ultra wideband radio systems.

### BACKGROUND OF THE DISCLOSURE

**[0002]** Ultra wideband (UWB) radio systems provide large bandwidths. Deployment of UWB systems at low power levels is permitted within the 3.1-10.6 GHz spectrum (typically expected at 6 GHz or more).

**[0003]** State of the art modulations schemes such as orthogonal frequency domain multiplexing (OFDM) can maintain orthogonality while splitting wide spectrum signals into sub-bands or combining sub-bands into wide spectrum signals. Currently, only bandwidths of less than 100 MHz have been able to exploit OFDM due to its large processing requirements. Even the high end digital samplers at 1-2 GHz, are still 6 times slower today than what may be needed. Unfortunately the digital signal processing power and sampling rates required by such state of the art modulation schemes may be prohibitive for UWB bandwidths in electronic circuitry anytime in the near future.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0004] The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings.

[0005] **Figure 1** illustrates one embodiment of an ultra wideband transceiver radio system with optical transforms.

[0006] **Figures 2a-2b** illustrate embodiments of ultra wideband radio receiver apparatus with optical transforms.

[0007] **Figures 3a-3b** illustrate embodiments of ultra wideband radio transmitter apparatus with optical inverse transforms.

[0008] **Figure 4** illustrates a flow diagram of one embodiment of a process for orthogonal frequency domain multiplexing (OFDM) with optical transforms in an ultra wideband receiver.

[0009] **Figure 5** illustrates a flow diagram of one embodiment of a process for OFDM with optical transforms in an ultra wideband transmitter.

## DETAILED DESCRIPTION

**[0010]** Disclosed herein are processes and apparatus for an ultra wideband transceiver with optical transforms. One embodiment of a receiving apparatus includes an antenna to receive an ultra wideband radio signal having a plurality of modulation frequencies. A low noise amplifier is coupled with the antenna to drive a laser source from the ultra wideband radio signal to produce an optical signal having a plurality of spectral components. A diffraction grating transforms the optical signal into its spectral components. An array of photo-detectors converts the spectral components into electronic signals corresponding to the plurality of modulation frequencies.

**[0011]** An embodiment of a transmitting apparatus includes an array of laser emitters driven by electronic signals corresponding to a plurality of channel modulation frequencies to produce optical signals corresponding to a plurality of spectral components. A diffraction grating inverse- transforms the spectral components into a composite optical signal. A photo-detector converts the composite optical signal into a composite electronic signal including the plurality of modulation frequencies. An amplifier amplifies the composite electronic signal for transmission as an ultra wideband radio signal.

**[0012]** These and other embodiments of the present invention may be realized in accordance with the following teachings and it should be evident that various

modifications and changes may be made in the following teachings without departing from the broader spirit and scope of the invention. It will be appreciated that while examples presented below illustrate using optical transforms for orthogonal frequency domain multiplexing (OFDM) in an ultra wideband (IEEE Std. 802.15.3a will be available from [standards.ieee.org/getieee802](http://standards.ieee.org/getieee802)) transceiver, the techniques disclosed are more broadly applicable. For example, systems using the IEEE's 802.11a (available from [standards.ieee.org/getieee802](http://standards.ieee.org/getieee802)) in the United States, titled "High Speed Physical Layer in the 5GHz band," or systems using the European Telecommunications Standards Institute's HiperLAN/2 (available from [portal.etsi.org/bran/hta/Hiperlan/hiperlan2.asp](http://portal.etsi.org/bran/hta/Hiperlan/hiperlan2.asp)), which stands for "High Performance Radio Local Area Network," may also make advantageous use of such techniques. The specification and drawings are, accordingly, to be regarded in an illustrative rather than restrictive sense and the invention measured only in terms of the accompanying claims.

**[0013]**     **Figure 1** illustrates one embodiment of an ultra wideband transceiver radio system 101 with optical transforms 114 and 124. In receiver radio 102, an antenna 111 may receive a first ultra wideband radio signal having a plurality of modulation frequencies. A low noise amplifier 112 coupled with the antenna 111 drives a laser source of optical transform 114 from the first ultra wideband radio signal to produce an optical signal.

[0014] Optical transform 114 separates the first optical signal into its spectral components, substantially performing the function of a Fourier transform. Photo-detectors convert the separate spectral components into a plurality of electronic signals that correspond to the plurality of modulation frequencies and transmit the plurality of electronic signals to receiver circuitry 116. Receiver circuit 116 may perform well known operations of OFDM, such as demapping, deinterleaving, and forward-error-correction (FEC) decoding.

[0015] Receiver circuit 116 is coupled with transmitter circuit 110 and control circuit 119 via bus 118. Transmitter circuit 110 may perform well known operations of OFDM such as FEC convolutional encoding, interleaving and mapping. A second plurality of electronic signals corresponding to the plurality of modulation frequencies drive laser emitters to produce a plurality of optical signals of corresponding spectral components. Optical inverse transform 124 consolidates the plurality of optical signals into a second optical signal including their corresponding spectral components, substantially performing the function of an inverse-Fourier transform. A photo-detector converts the second optical signal into a composite electronic signal including the plurality of modulation frequencies and transmits the composite electronic signal to processing block 123. Processing block 123 may perform well known operations of OFDM, such as guard interval (GI) addition, symbol wave shaping and interphase/quadrature (IQ) modulation. A high power amplifier 122 coupled with antenna 111, amplifies the composite electronic signal

including the plurality of modulation frequencies for transmission by antenna 111 as a second ultra wideband radio signal.

**[0016]** It will be appreciated that a UWB transceiver radio system using optical transforms 114 and 124 may provide for optical processing of GHz wide spectrum, which may not be possible anytime in the near future for electronic processing techniques. For example, state-of-the-art electronic samplers currently digitize samples at rates of 1-1.5 GHz, but to meet the Nyquist criteria for 6GHz of bandwidth would require at least a 12GHz sampler. Therefore, even if such samplers were available, optical processing may provide for solutions at reduced cost and reduced power consumption. It will also be appreciated that transceiver radio systems may also benefit from an optical transform only in the receiver or in the transmitter, rather than both.

**[0017]** **Figures 2a** illustrate one embodiment of ultra wideband radio receiver apparatus 201 with an optical transform. Antenna 211 may receive an ultra wideband radio signal having a plurality of modulation frequencies. Low noise amplifier 212 is coupled with antenna 211 to drive a laser source 213 from the ultra wideband radio signal to produce an optical signal having a plurality of spectral components. Laser source 213 may be an edge emitting laser, such as a Fabry-Perot laser for example, or may be a vertical cavity surface-emitting (VCSEL) laser. Diffraction grating 214 transforms the optical signal into its spectral components. Transforming the optical signal is accomplished by transmitting the optical signal through diffraction grating



214. A plurality of photo-detectors 215 convert the optical spectral components into electronic signals corresponding to the plurality of modulation frequencies and transmits the electronic signals to receiver circuitry 116. As in Figure 1, receiver circuit 116 may perform well known operations of OFDM, such as demapping, deinterleaving, and FEC decoding.

**[0018]** Figures 2b illustrate an alternative embodiment of ultra wideband radio receiver apparatus 202 with an optical transform. In similarity to Figure 2a, antenna 211 may receive an ultra wideband radio signal having a plurality of modulation frequencies and amplifier 212 drives laser source 213 from the ultra wideband radio signal to produce an optical signal having a plurality of spectral components.

Diffraction grating 224 transforms the optical signal into its spectral components. In this case, transforming the optical signal is accomplished by reflecting the optical signal with diffraction grating 224. Photo-detectors 215 convert the optical spectral components into electronic signals corresponding to the plurality of modulation frequencies and transmits the electronic signals to receiver circuitry 116.

**[0019]** Figures 3a illustrates one embodiment of an ultra wideband radio transmitter apparatus 301 with an optical inverse transform. A plurality of laser emitters 313 are driven by electronic signals corresponding to a plurality of modulation frequencies to produce optical signals corresponding to a plurality of spectral components. The plurality of laser emitters 313 may comprise edge emitting lasers and/or VCSEL lasers. For one embodiment, emitters 313 comprise a coherent

array of emitters, for example, being generated from a single laser source and independently modulated with electro-absorption modulators or lithium-niobate modulators. Diffraction grating 314 inverse transforms the optical signals into a composite optical signal including the plurality of spectral components. Inverse-transform of the optical signals is accomplished by transmitting the optical signals through diffraction grating 314. Photo-detector 315 converts the composite optical signal including the plurality of spectral components into a composite electronic signal including the plurality of modulation frequencies and transmits the composite electronic signal to processing block 323. As above, processing block 323 may perform well known operations of OFDM, such as GI addition, symbol wave shaping and IQ modulation. A high power amplifier 322 is coupled with an antenna 321 to amplify the composite electronic signal including the plurality of modulation frequencies for transmission by antenna 321 as an ultra wideband radio signal.

**[0020]** **Figures 3b** illustrates an alternative embodiment of an ultra wideband radio transmitter apparatus 302 with an optical inverse transform. In similarity to Figure 3a, laser emitters 313 are driven by electronic signals corresponding to a plurality of modulation frequencies to produce optical signals. Diffraction grating 324 inverse transforms the optical signals into a composite optical signal. Inverse transform of the optical signals is accomplished by reflecting the plurality of optical signals with the diffraction grating 324. Photo-detector 315 converts the composite optical signal into a composite electronic signal including the plurality of modulation

frequencies and transmits the composite electronic signal to processing block 323, which transmits to high power amplifier 322 to amplify the composite electronic signal for transmission by antenna 321 as an ultra wideband radio signal.

[0021] It will be appreciated that through the use of optical based Fourier transforms and inverse-Fourier transforms, reductions may be made in the speed and power requirements of the electronic processing components while still providing for very high UWB system performance.

[0022] **Figure 4** illustrates a flow diagram of one embodiment of a process for OFDM with optical transforms in an ultra wideband receiver. Process 401 and other processes herein disclosed are performed by processing blocks that may comprise dedicated electronic or photonic hardware or software or firmware operation codes executable by general purpose machines or by special purpose machines or by a combination of both. It will be appreciated that while process 401 and other processes herein disclosed are illustrated, for the purpose of clarity, as processing blocks with a particular sequence, some operations of these processing blocks may also be conveniently performed in parallel or their sequence may be conveniently permuted so that the some operations are performed in different orders, or some operations may be conveniently performed out of order.

[0023] In processing block 411, a wideband radio signal having a plurality of modulation frequencies is received, for example a UWB signal. Processing proceeds in processing block 412 where the ultra wideband radio signal is electronically

amplified, for example through a low noise amplifier 112, to directly modulate a laser emitter in processing block 413 to produce an optical signal having a plurality of spectral components. In processing block 414, an optical Fourier transform is performed on the optical signal. Processing continues in processing block 415 where the separate spectral components are received and converted by corresponding photo-detectors into electronic signals corresponding to modulation frequency channels.

**[0024]** It will be appreciated that while examples herein presented illustrate the use of optical Fourier transforms for OFDM, for example in a UWB transceiver (IEEE Std. 802.15.3a, not currently available), or for example in a system using IEEE Std. 802.11a (available from [standards.ieee.org/getieee802/](http://standards.ieee.org/getieee802/)); it is not necessary that any particular OFDM standard be used, and therefore processing blocks which may perform processing specific to OFDM may be considered optional. In processing block 416 the electronic signals are amplified and processing optionally proceeds to processing block 417 where OFDM demapping and deinterleaving occurs. Finally in processing block 418 optional forward-error-correction (FEC) decoding occurs.

**[0025]** **Figure 5** illustrates a flow diagram of one embodiment of a process for OFDM with optical inverse-Fourier transforms in an ultra wideband transmitter. In processing block 511, optional FEC convolutional encoding occurs. Processing then optionally proceeds to processing block 512 where OFDM interleaving and mapping occurs. Processing then proceeds to processing block 513 where a plurality of laser emitters are directly modulated by electronic signals corresponding to a plurality of

modulation frequencies to produce optical signals corresponding to a plurality of spectral components. In processing block 514 an optical inverse-Fourier transform is performed on the optical signals to produce a composite optical signal including the plurality of spectral components. In processing block 515, a photo-detector receives and converts the composite optical signal including the plurality of spectral components into a composite electronic signal including the plurality of modulation frequencies. Processing optionally proceeds in processing blocks 516-518 where OFDM processing: guard interval (GI) addition, symbol wave shaping and interphase/quadrature (IQ) modulation occurs. Processing then proceed to processing block 519 where the composite electronic signal including the plurality of modulation frequencies is amplified for transmission, for example as a UWB radio signal.

**[0026]** The above description is intended to illustrate preferred embodiments of the present invention. From the discussion above it should also be apparent that especially in such an area of technology, where growth is fast and further advancements are not easily foreseen, the invention may be modified in arrangement and detail by those skilled in the art without departing from the principles of the present invention within the scope of the accompanying claims.

## THE CLAIMS

What is claimed is:

1. A method comprising:

receiving a broadband radio signal having a plurality of modulation frequencies;

amplifying the broadband radio signal to drive a laser source to produce an optical signal having a plurality of spectral components;

optically transforming the optical signal to separate the plurality of spectral components into a plurality of corresponding photo-detectors; and

converting the plurality of spectral components into a plurality of separate electronic signals corresponding to the plurality of modulation frequencies.

2. The method of Claim 1 wherein optically transforming the optical signal is accomplished by transmitting the optical signal through a diffraction grating.
3. The method of Claim 1 wherein optically transforming the optical signal is accomplished by reflecting the optical signal off a diffraction grating.
4. The method of Claim 1 wherein said laser source is a vertical cavity surface emitting (VCSEL) laser.

5. The method of Claim 1 wherein said laser source is edge emitting.
6. The method of claim 1 further comprising:  
demapping said separate electronic signals corresponding to the plurality of modulation frequencies.
7. The method of claim 6 further comprising:  
deinterleaving said separate electronic signals corresponding to the plurality of modulation frequencies.
8. The method of claim 1 wherein the broadband radio signal is an ultra wideband radio signal.
9. The method of claim 8 further comprising Fourier transforming the optical signal to separate the plurality of spectral components.
10. A method comprising:  
driving a plurality of laser emitters from a plurality of electronic signals of a plurality of modulation frequencies to produce a plurality of optical signals of a plurality of spectral components;

optically inverse transforming the plurality of optical signals into a composite optical signal including the plurality of spectral components;

converting the composite optical signal including the plurality of spectral components into a composite electronic signal including the plurality of modulation frequencies; and

amplifying the composite electronic signal including the plurality of modulation frequencies for transmission as an ultra wideband radio signal.

11. The method of Claim 10 wherein optically inverse transforming the plurality of optical signals is accomplished by transmitting the plurality of optical signals through a diffraction grating.
12. The method of Claim 10 wherein optically inverse transforming the plurality of optical signals is accomplished by reflecting the plurality of optical signals off a diffraction grating.
13. The method of Claim 10 wherein said plurality of laser emitters are VCSEL.
14. The method of Claim 10 wherein said plurality of laser emitters are edge emitting.



15. The method of claim 10 further comprising:

interleaving and mapping said plurality of electronic signals of the plurality of modulation frequencies.

16. The method of claim 15 further comprising:

symbol wave shaping and IQ modulating said composite electronic signal including the plurality of modulation frequencies.

17. A method of claim 10 further comprising transmitting said composite electronic signal including the plurality of modulation frequencies as a broadband radio signal.

18. A method of claim 17 further comprising inverse-Fourier transforming the plurality of optical signals.

19. An apparatus comprising:

an antenna to receive a broadband radio signal having a plurality of modulation frequencies;

a low noise amplifier coupled with the antenna to drive a laser source from the broadband radio signal to produce an optical signal having a plurality of spectral components;

a diffraction grating to optically transform the optical signal into the plurality of spectral components; and

a plurality of photo-detectors to convert the plurality of spectral components into a plurality of electronic signals corresponding to the plurality of modulation frequencies.

20. The apparatus of Claim 19 wherein said transform of the optical signal is accomplished by separating the optical signal through the diffraction grating.
21. The apparatus of Claim 19 wherein said transform of the optical signal is accomplished by reflecting the plurality of optical signals with the diffraction grating.
22. The apparatus of Claim 19 wherein said laser source is VCSEL.
23. The apparatus of Claim 19 wherein said laser source is edge emitting.
24. The apparatus of Claim 19 wherein the broadband radio signal is an ultra wideband radio signal.

25. The apparatus of Claim 19 wherein the diffraction grating optically transforms the optical signal into a plurality of Fourier components.

26. An apparatus comprising:

a plurality of coherent laser emitters, a plurality of electronic signals corresponding to a plurality of modulation frequencies to drive said plurality of coherent laser emitters to produce a plurality of optical signals corresponding to a plurality of spectral components;

a diffraction grating to optically inverse transform the plurality of optical signals into a composite optical signal including the plurality of spectral components;

a photo-detector to convert the composite optical signal including the plurality of spectral components into a composite electronic signal including the plurality of modulation frequencies;

an antenna to transmit a broadband radio signal having a plurality of modulation frequencies; and

a high power amplifier coupled with an antenna to amplify the composite electronic signal including the plurality of modulation frequencies for transmission by the antenna as said broadband radio signal.

27. The apparatus of Claim 26 wherein said inverse transform of the plurality of optical signals is accomplished by transmitting the plurality of optical signals through the diffraction grating.
28. The apparatus of Claim 26 wherein said inverse transform of the plurality of optical signals is accomplished by reflecting the plurality of optical signals with the diffraction grating.
29. The apparatus of Claim 26 wherein said plurality of laser emitters are VCSEL.
30. The apparatus of Claim 26 wherein said plurality of laser emitters are edge emitting.
31. The apparatus of Claim 26 wherein the broadband radio signal is an ultra wideband radio signal.
32. The apparatus of Claim 31 wherein the diffraction grating inverse-Fourier transforms the plurality of optical signals.
33. A system comprising:
- an antenna to receive a first broadband radio signal having a plurality of

modulation frequencies;

a low noise amplifier coupled with the antenna to drive a laser source from the first ultra wideband radio signal to produce a first optical signal having a plurality of spectral components;

a first diffraction grating to optically transform the first optical signal into the plurality of spectral components; and

a plurality of photo-detectors to convert the plurality of spectral components into a first plurality of electronic signals corresponding to the plurality of modulation frequencies

a plurality of coherent laser emitters, a second plurality of electronic signals corresponding to the plurality of modulation frequencies to drive said plurality of coherent laser emitters to produce a plurality of optical signals corresponding to the plurality of spectral components;

a second diffraction grating to optically inverse transform the plurality of optical signals into a second optical signal including the plurality of spectral components;

a photo-detector to convert the second optical signal including the plurality of spectral components into a composite electronic signal including the plurality of modulation frequencies; and

a high power amplifier coupled with an antenna to amplify the composite

electronic signal including the plurality of modulation frequencies for transmission by the antenna as a second broadband radio signal.

34. The system of Claim 33 wherein said transform and inverse transform are accomplished by transmitting one or more optical signal through the respective diffraction grating.
35. The system of Claim 33 wherein said transform and inverse transforms are accomplished by reflecting one or more optical signal with the diffraction grating.
36. The system of Claim 33 wherein said laser source is VCSEL.
37. The system of Claim 36 wherein said plurality of laser emitters are VCSEL.
38. The system of Claim 33 wherein said plurality of laser emitters are edge emitting.
39. The system of Claim 38 wherein said laser source is edge emitting.
40. The system of Claim 33 wherein the first and second broadband radio signals are ultra wideband radio signals.

1/7

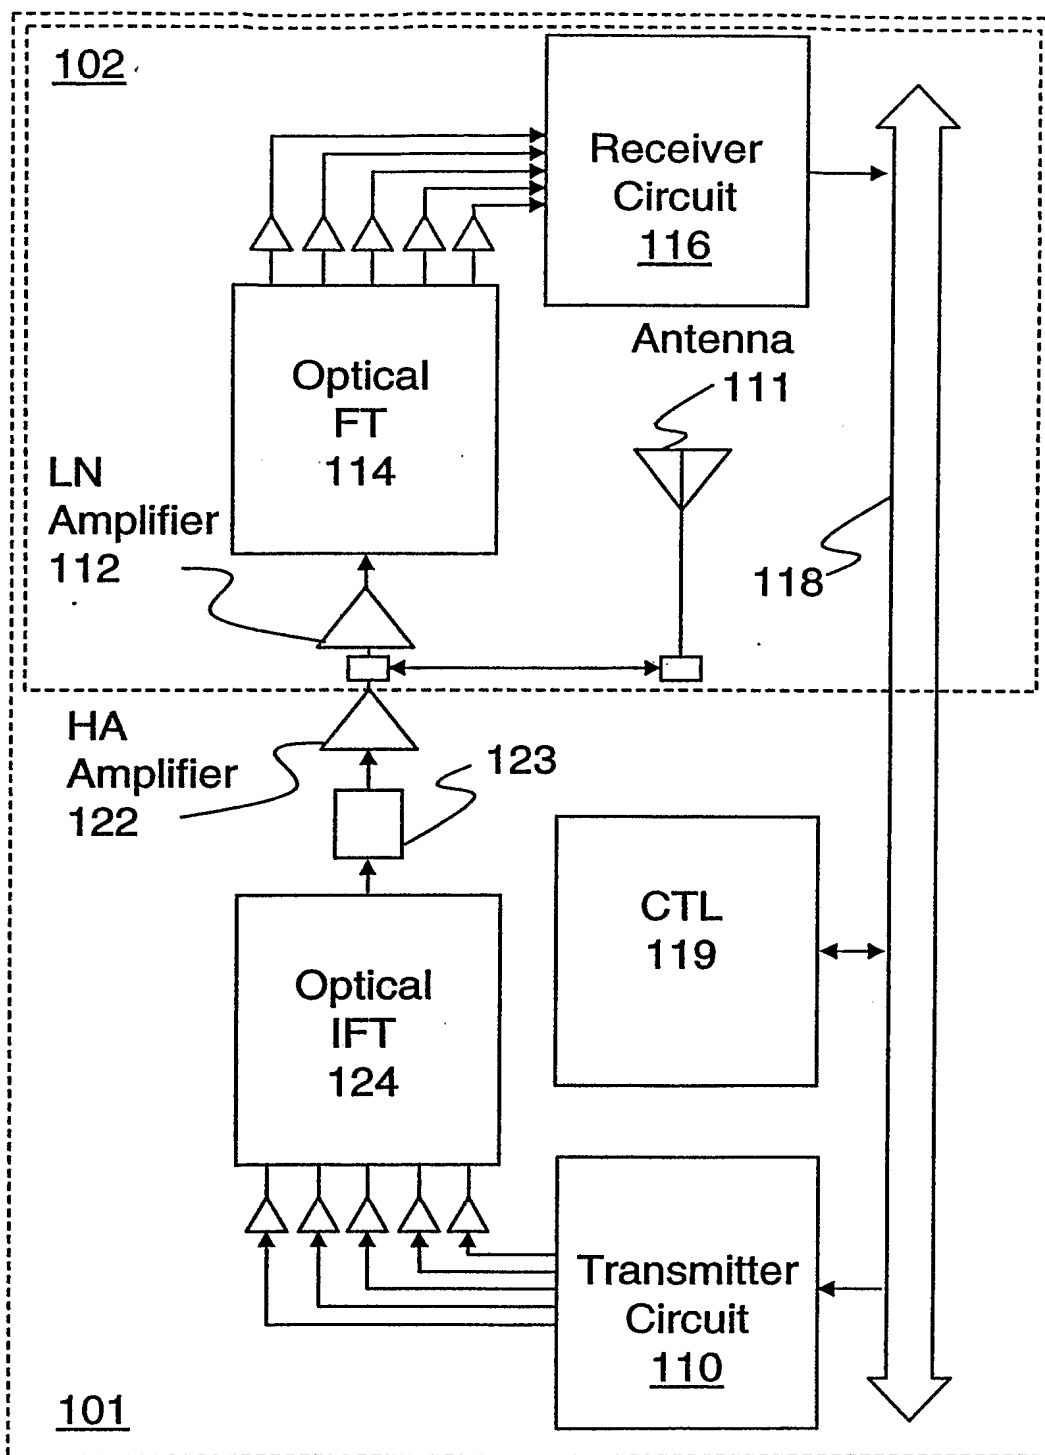


FIG. 1

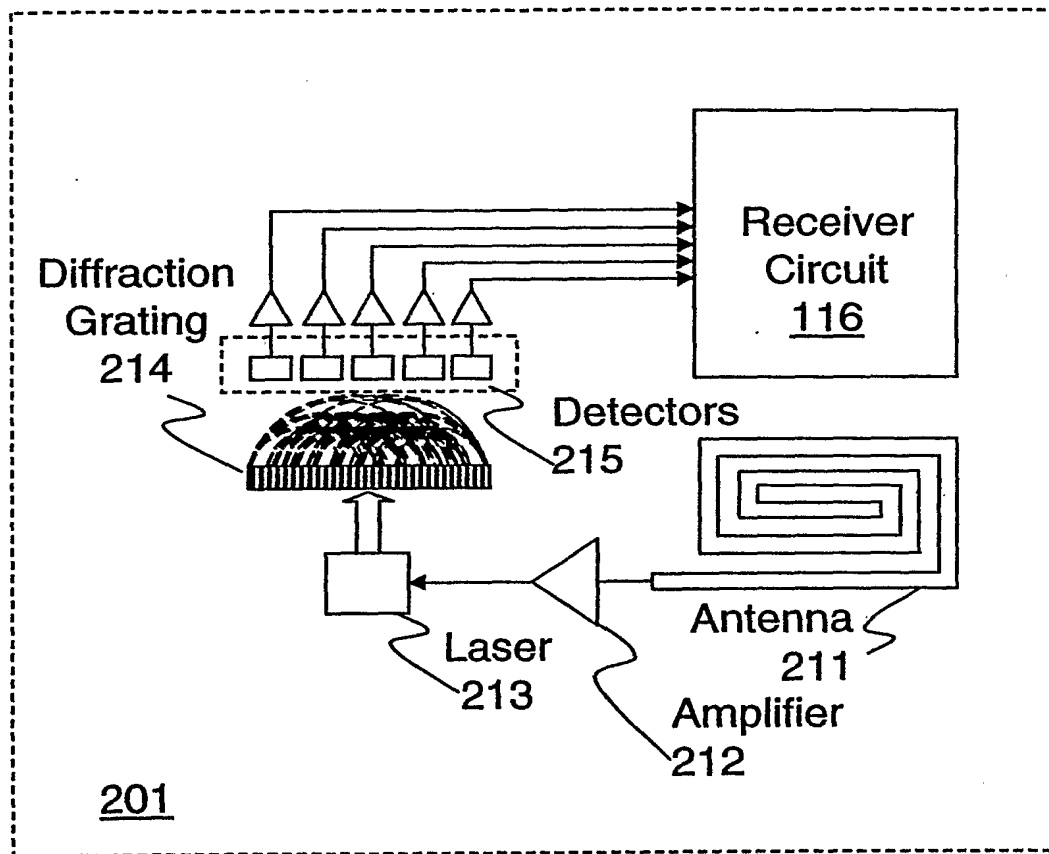


FIG. 2a



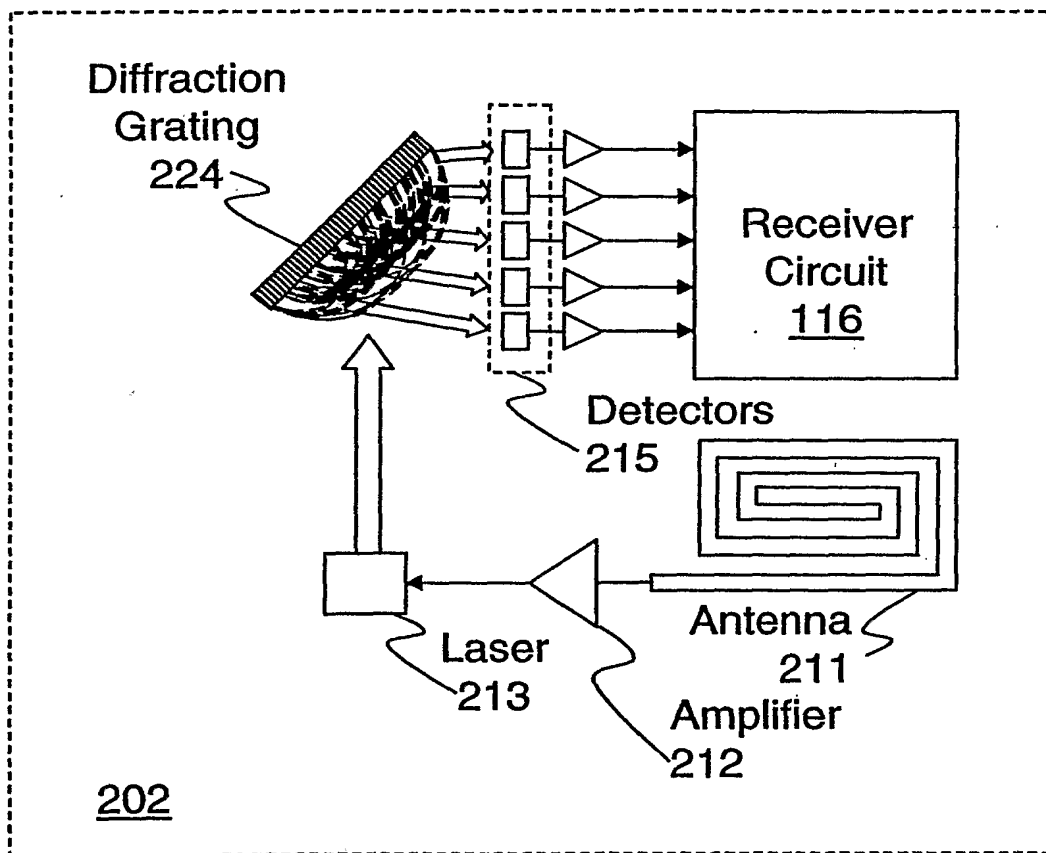


FIG. 2b

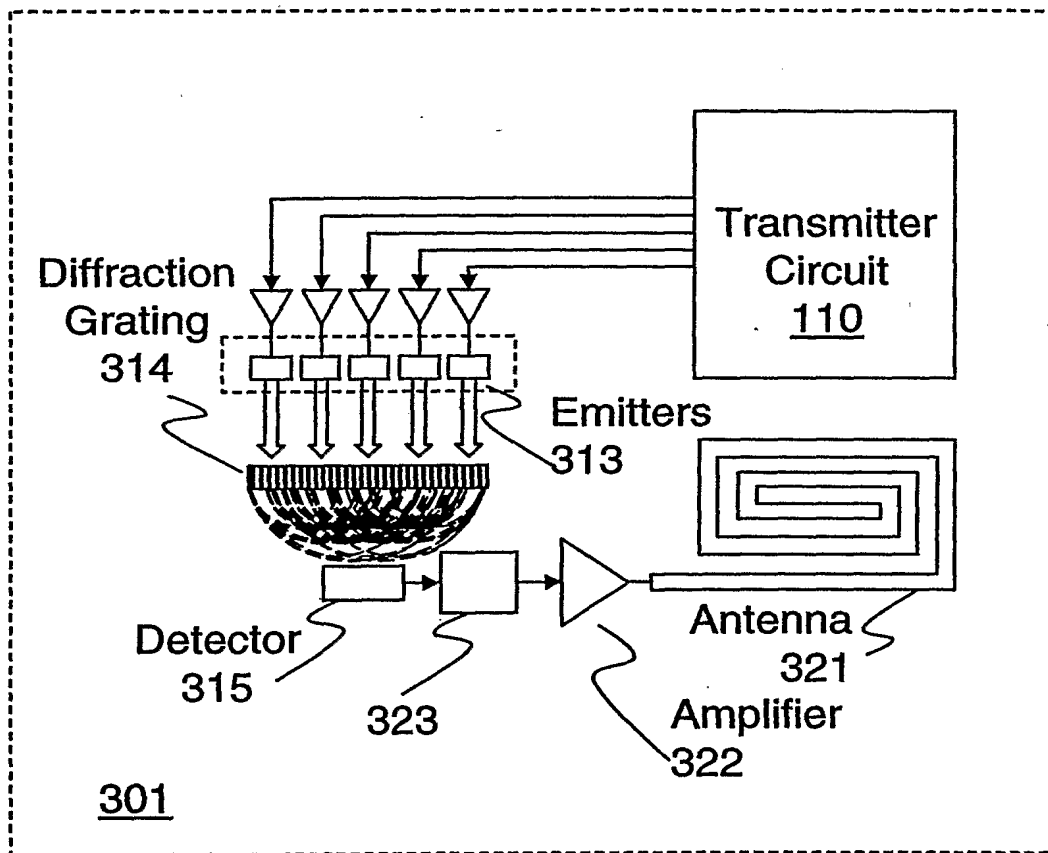


FIG. 3a

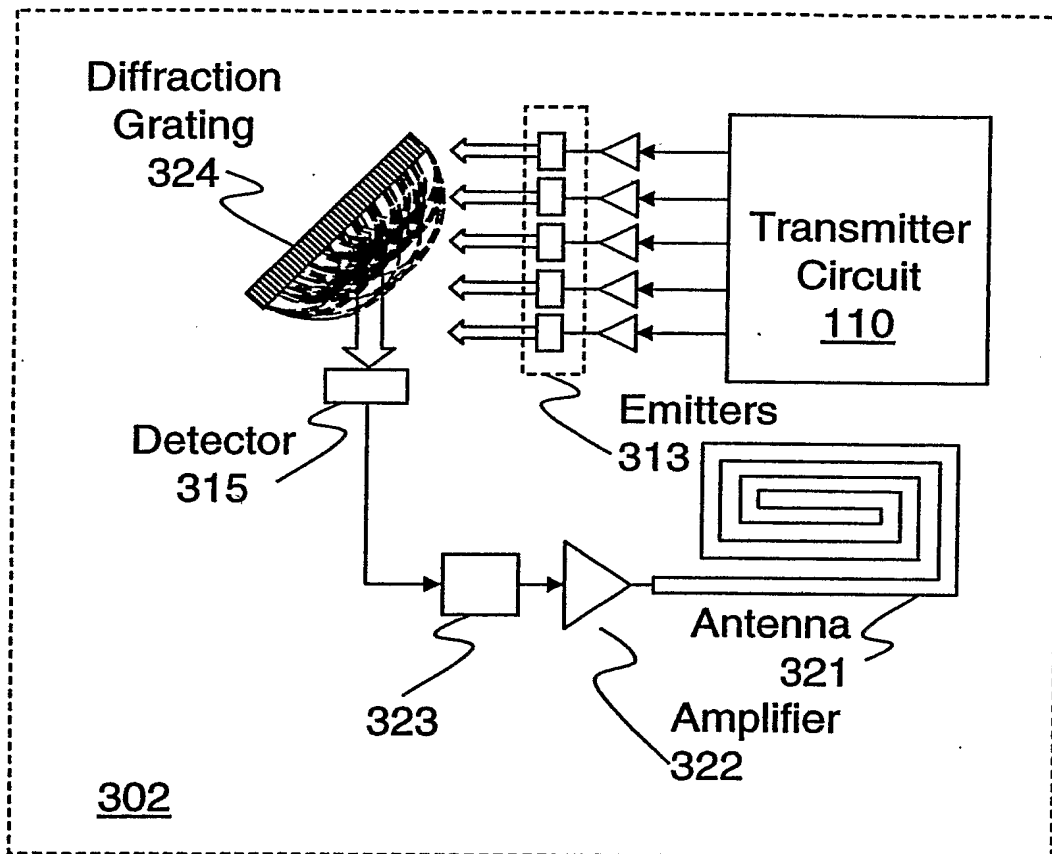


FIG. 3b

6/7

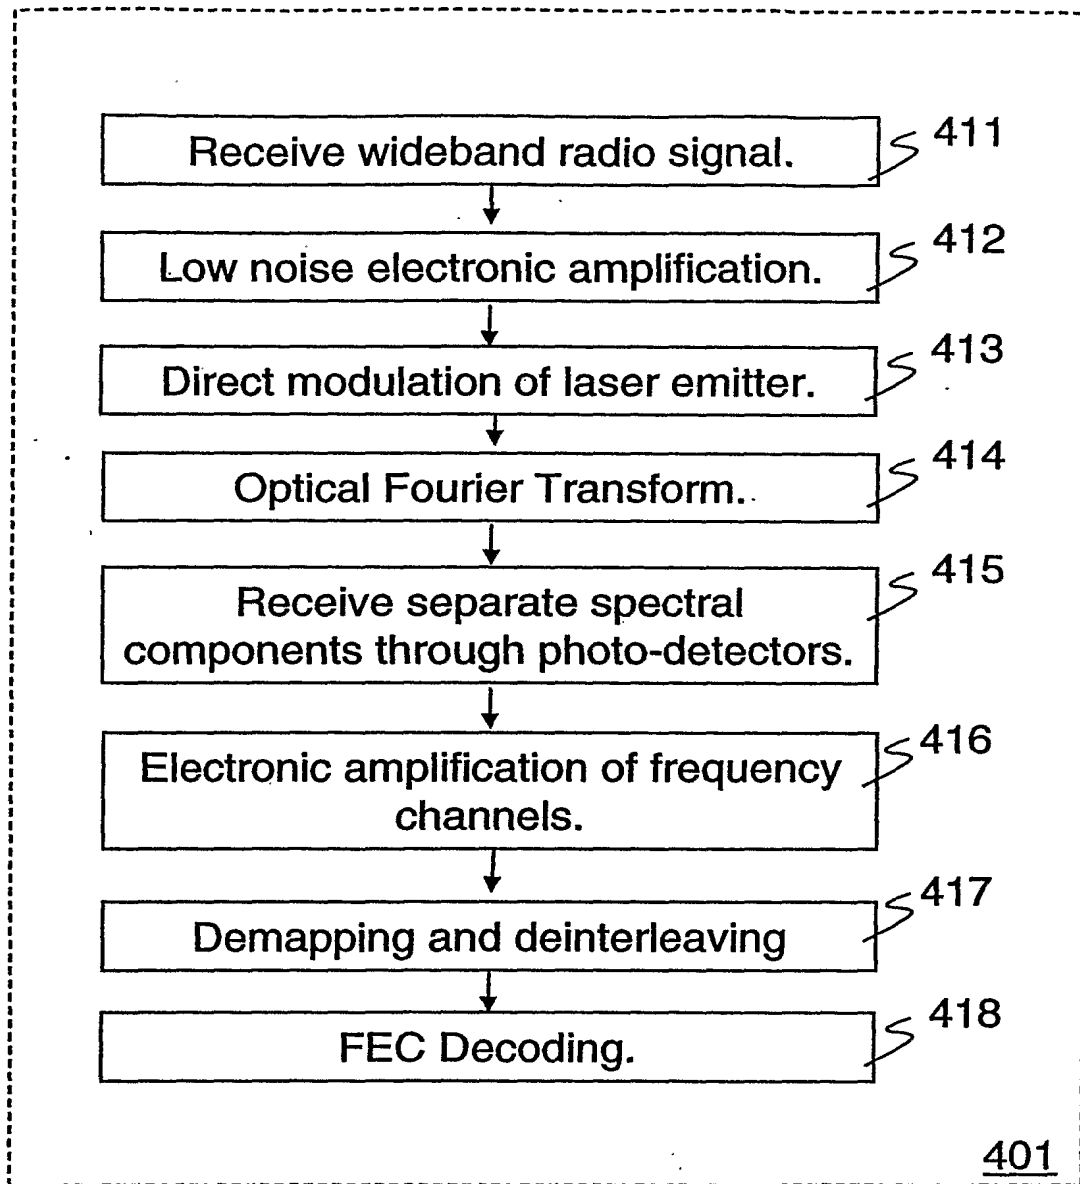


FIG. 4

7/7

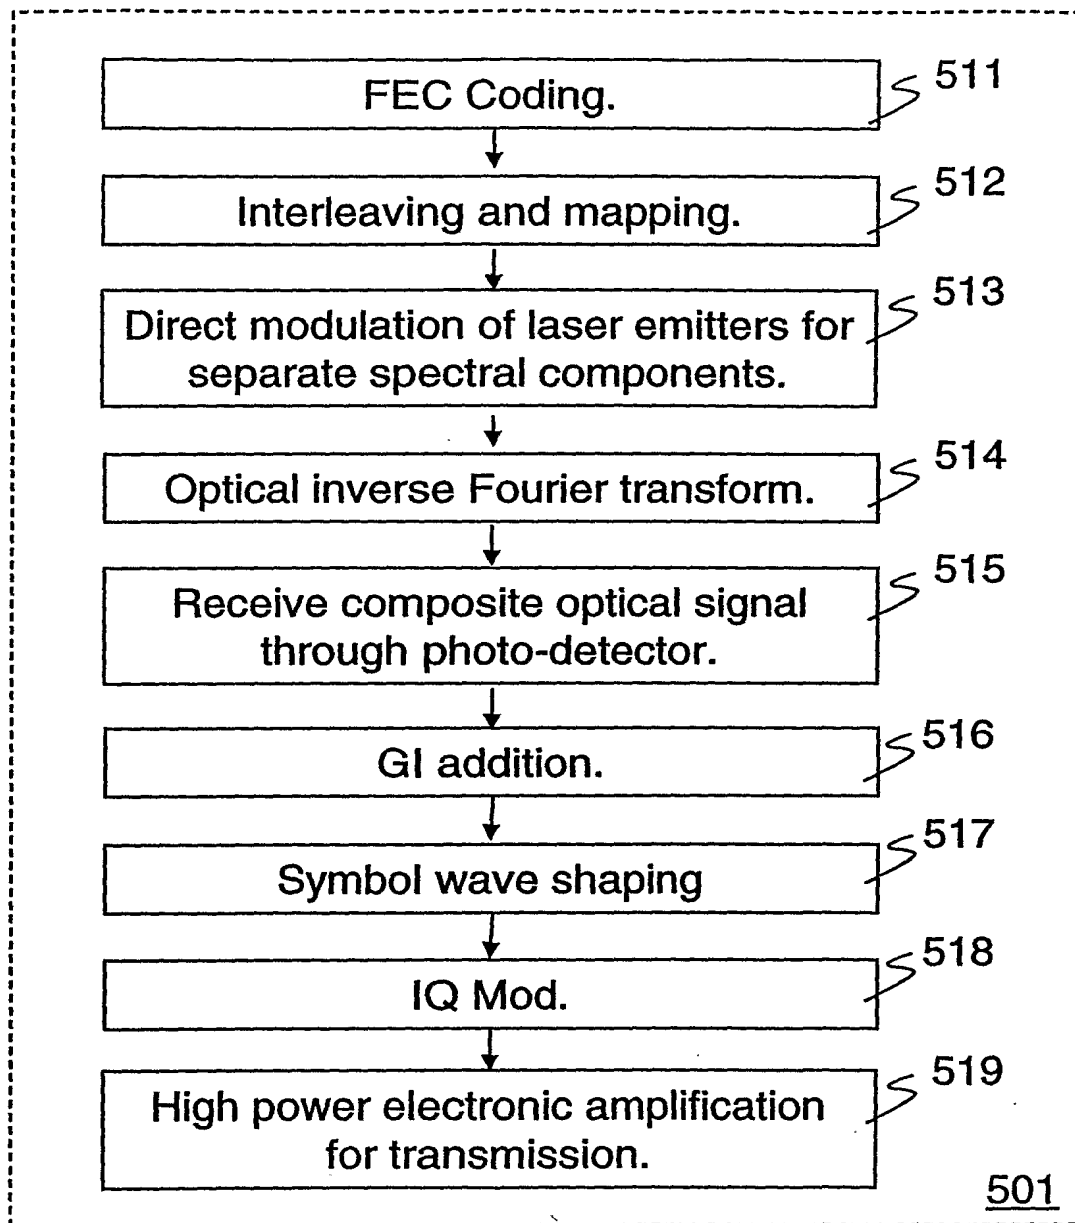


FIG. 5

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US2004/043686

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04B10/12 H04L27/26 H04L5/02 H04J11/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04L H04J H04B G06E

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/147655 A1 (SHATTIL STEVE J) 7 August 2003 (2003-08-07) abstract paragraph '0003! - paragraph '0019! paragraph '0100! - paragraph '0102! paragraph '0122! paragraph '0178! - paragraph '0197! figures 4A,5A,5B,13A-13D,14A	1-40
A	US 2003/202794 A1 (IZADPANAH HOSSEIN ET AL) 30 October 2003 (2003-10-30) the whole document ----- -/--	1-40

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

25 April 2005

Date of mailing of the international search report

02/05/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Rolan Cisneros, E

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US2004/043686

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	KUSUMA J ET AL: "Sampling with finite rate of innovation: Channel and timing estimation for UWB and GPS" ICC 2003. 2003 IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS. ANCHORAGE, AK, MAY 11 - 15, 2003, IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, NEW YORK, NY : IEEE, US, vol. VOL. 1 OF 5, 11 May 2003 (2003-05-11), pages 3540-3544, XP010643103 ISBN: 0-7803-7802-4 -----	1-40
A	US 2002/126338 A1 (VOLPI JOHN P ET AL) 12 September 2002 (2002-09-12) abstract paragraph '0007! - paragraph '0010! paragraph '0040! - paragraph '0066! figures 2A-2D, 4A-4D, 5A-5F -----	1-40

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2004/043686

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003147655 A1	07-08-2003	US 2002150070 A1 US 2002034191 A1	17-10-2002 21-03-2002
US 2003202794 A1	30-10-2003	AU 2003225146 A1 WO 03091760 A2 US 2003202801 A1	10-11-2003 06-11-2003 30-10-2003
US 2002126338 A1	12-09-2002	NONE	